

Total for system components

Dunbrik A1 Concrete Flue Liners

for domestic chimneys
Flue Costing
200 mm id

Tel: 01924 373694 Email: tech@dunbrik.co.uk

Web: dunbrik.co.uk

Costing for: **Typical Flue Detail Costing**House type House with 200mm I.D. Flue

Customer ref. Chimney Height 5963

Site

Costing ref SJ 200ID-6m-offset-23A

Date 13 October 2023

Cost ex-works

By SJ
Price list October 2023

Plot number	F	rice list	October 202	3	
Components	Product	Qty	Prices	Disc	Cost
	code		each	%	£
Dunbrik A1 concrete flue liner system					
Throat lintel/gather unit 800mm wide	200TL800	1	94.75		94.75
200mm flue liner bend 22.5 degrees	200B	2	18.29		36.58
200mm flue liner 600mm tall	200L600	7	18.74		131.18
200mm flue liner 230mm tall	200L230	2	11.21		22.42
200mm flue liner 150mm tall	200L150	1	8.85		8.85
Cannon pot 450mm tall red	Cann450R	1	50.90		50.90
Flue liner sealant 310ml	Dunseal	5	6.68		33.40
Infill aggregate 22kg mix for void	Dunfil	15	6.98		104.70
Flue notice plate	Plate	1	7.73		7.73
Topguard birdguard cowl 260 tall red	TG260R	1	101.36		101.36

Total for System components			Delivery charge		
			Goods	£	60.00 651.87
			VAT @	20%	130.37
			Total	£[782.24
Additional products (if required)					
Smoke pellet tube	Smoke	1	11.34		11.34
310ml Skeleton Gun	Sealgun	1	6.40		6.40
Red polypropylene air brick 220mm x 72mm	REDG930	3	0.92		2.76
High impact styrene black cavity sleeve 218mm x 72mm	CSG935	3	5.03		15.09

Plus VAT @ 20%

591.87

All prices are ex-works, valid for 30 days and are subject to VAT.

Charge for individually plotting multiple flue orders is £30 per plot.

Free delivery for orders over £1,000 nett invoice value (ex-Vat) to UK mainland excluding the Highlands of Scotland (POA).

All trading is subject to our standard conditions of sale (copy available).

Notes

This flue costing is based on information provided. Please have your architect check the costing to your drawings prior to ordering, to ensure that it meets with your requirements. Please also check the pot/terminal style and colour.

For construction guidance refer to the flue illustration and the installation guide available on our website dunbrikflues.co.uk

The infill is based on a 300mm x 352mm void between the liners and masonry

Please ensure that the flue and chimney are constructed in accordance with Building regulations part J

Dunbrik (Yorks) Ltd 172 Ferry Lane, Stanley, Wakefield WF3 4LT - Registered in England 419512




Typical flue detail 200mm I.D. flue liner system for open fire with offset.

Date: October 23

Ref: 200id-6m-offset-23A

Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

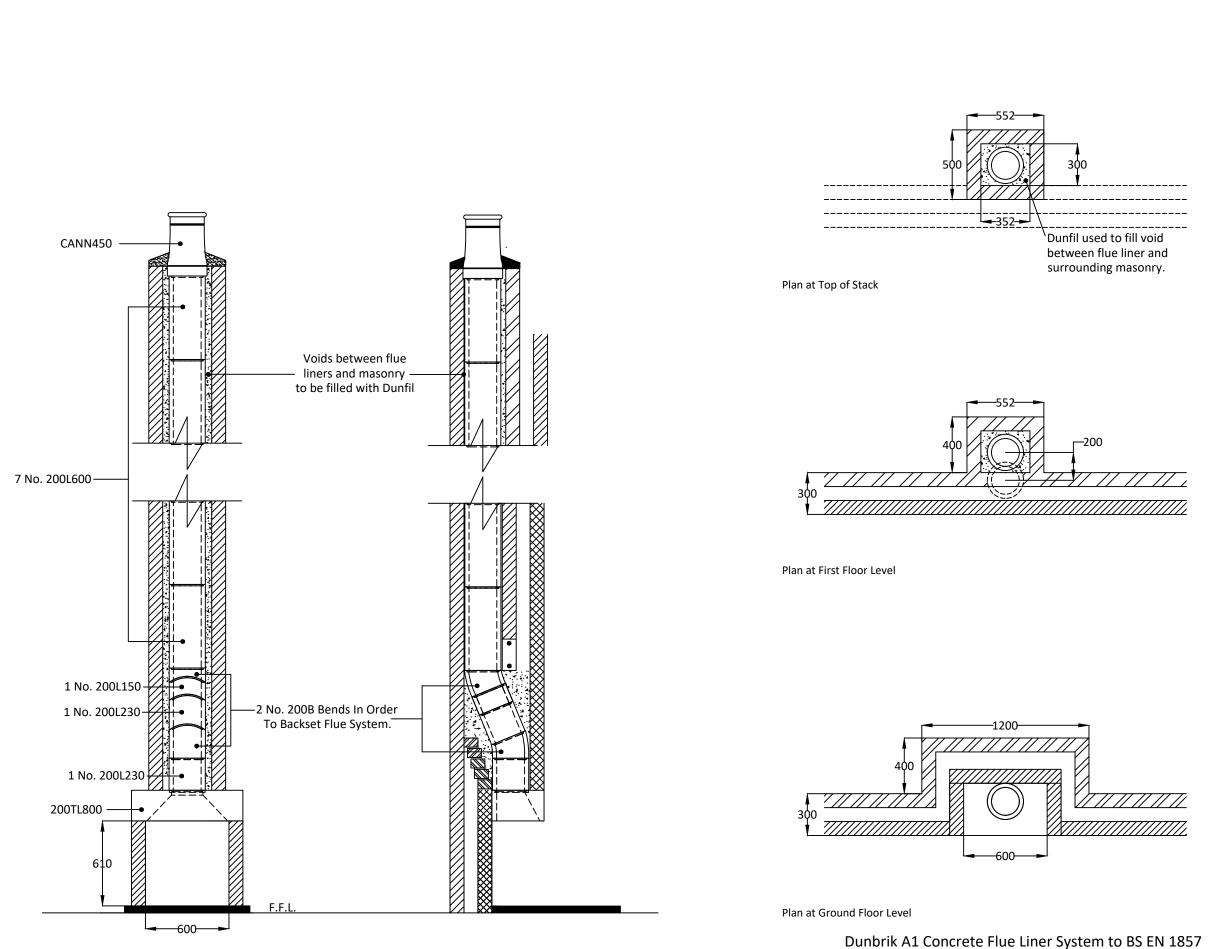

Notes

Chimney Height of 5963mm from FFL to underside of chimney pot.

Please have your architect check this typical flue detail to your drawings to ensure it meets both your requirements and current building regulations.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES
NOT TO SCALE



Dunbrik (Yorks) Ltd

Tel: 01924 373694 Email: tech@dunbrik.co.uk

The checklist is based on Building Regulations ADJ Appendix A. with Dunbrik flue liner system data. The builder/installer should insert details of the actual fireplace opening sizes, actual ventilation installed and any variations to the usual data.

Typical Flue Detail Costing SJ 200ID-6m-offset-23A For Costing ref Site at Plot number System **Dunbrik 200mm id A1 concrete flue liners** House with 200mm I.D. Flue House type Date 13 Oct 2023 200 mm id Customer ref. Chimney Height 5963

Checklist for hearths, fireplaces, flues and chimneys

	Items listed in ADJ Appendix A	Details for builder to complete or am	end		
1	Building address, where work has been carried out	· · ·			
			Amend		
:	Identification of hearth, fireplace, chimney or flue.	Fireplace in lounge			
3	Firing capability: solid fuel/gas/oil/all	All			
	Intended type of appliance. State type or make. If open fire give finished fireplace opening dimensions.	For domestic fuel stove up to a 200mm external diameter flue outlet pipe			
;	Ventilation provisions for the appliance State type and area of permanently open air vents	Through wall ventilation As per stove manufacturers requirements			
	Chimney or flue construction State the type or make and whether new or existing.	New masonry chimney with: Dunbrik A1 concrete flue liners to BSEN1857			
)	Internal flue size (and equivalent flue height, where calculated natural draught gas appliances only).	200mm internal diameter			
)	If liners are used confirm they are correctly jointed in accordance with manufacturers instructions and state jointing materials used.	Tongue downwards into rebate and joined with Dunseal fireproof mortar			
)	If an existing chimney has been refurbished with a new liner, type or make of liner fitted.				
)	Details of flue outlet terminal Outlet detail	Cannon pot 450mm tall			
	Complies with				
)	Number and angle of bends.	2 bends ref 200B at 22.5 degrees			
)	Provision for cleaning and recommended frequency.	Annually via stove			
,	Hearth. Form of construction. New or existing				
_	Inspection and testing after completion	As diagram 25 in ADJ Tests carried out by:			
	Test (Appendix E in AD J 2002) and results Flue inspection results Sweeping Coring ball Smoke	,			
	Appliance (where included) Spillage				
_	I/We the undersigned confirm that the above details relevant requirements in Part J of Schedule 1 to th		th the		
	Print name & title	Profession			
	Capacity	Tel no			
	Address	Postcode			
	Signed	Date			
	Registered membership of (e.g. Gas Safety, OFTEC, F				