



8i bVf] 5%7cbWYH: i Y@bYfg  
 IRU GRPHVWLF FKLPQH\ V  
 : i Y7cghb]  
 PP LG

HY.'S% &(' + ' \*- (  
 (PDLO WHFK#GXQEULN FR  
 :HE ZZZ GXQEULN FR XN

&RVWLQJ.HiRW: i Y8YH] 7cghb]  
 +RXVH WISH +RXVH ZLWK PP , ' )OXH  
 &XVWRPHU UHI &KLPQH\ +HLJKW  
 6LWH  
 3ORW QXPEHU

&RVWLQJ WSS!+a !cZgYH&& 6  
 )HE'DXDU\  
 %\ 6-  
 3UL2FWQEHW

7ca dcbYblg

DfcXi W  
 WXY

Elm

DfjWg  
 YUW

7cgh  
 œ

7KURDW OLQWHO JDWKHU XQLW PP ZLGH  
 PP IOXH OLQHU EHQG GHJUHHV  
 PP IOXH OLQHU PP WDOO  
 PP IOXH OLQHU PP WDOO  
 PP IOXH OLQHU PP WDOO  
 )OXH OLQHU VHDODQW PO  
 ,QILOO DJJUHJDWH NJ PL[ IRU YRLG

7/  
 %  
 /  
 /  
 /  
 'XQVHDO  
 'XQILO

&DQQRQ SRW PP WDOO UHG  
 7RSJXDUG ELUGJXDUG FRZO WDOO UHG  
 )OXH QRWLFH SODWH  
 PO 6NHOHRQ \*XQ  
 5HG SRO\SURS\OHQH DLU EULFN PP [ PP  
 +LJK LPSDFW VW\UHQH EODFN FDYLW\ VOHHYH  
 6PRNH SHOOHW WXEH

&DQQ 5  
 7\* 5  
 3ODWH  
 6HDOJXQ  
 5(\*  
 88\*[ PP  
 6PRNH





\$OO SULFHV DUH H[ ZRUNV YDOLG IRU GD\ DQG DUH VXEMHFW WR 9\$7 œ (-)%.)  
 &KDUJH IRU LQGLYLGXDOO\ SORWWLQJ PXOWLSOH IOXH RUGHUV LV ... SHU SORW  
 )UHH GHOLYHU\ IRU RUGHUV RYHU ... QHWW LQYRLFH YDOXH H[ 9DW WR 8. PDLQODQ  
 \$OO WUDGLQJ LV VXEMHFW WR RXU VWDQGDUG FRQGLWLRQV RI VDOH FRS\ DYDLODEOH

Bclhg

7KLV IOXH FRVWLQJ LV EDVHG RQ LQIRUPDWLRQ SURYLGHG 3OHDVH KDYH \  
 WR HQVXUH WKDW LW PHHWV ZLWK \RXU UHTXLUHPHQWV 3OHDVH DOVR FKHFN WKH SRV  
 )RU FRQVWUXFWLRQ JXLGDQFH UHIHU WR WKH IOXH LOOXVWUDWLRQ DQG WKH LQVWDOOD  
 HAY]bZ``]gVUgYXcbU' S' a a l " +) a a j c]XVYk Yb h Y`]bYfgUbXa Ugcbfm  
 3OHDVH HQVXUH WKDW WKH IOXH DQG FKLPQH\ DUH FRQVWL  
 'XQEULN <RUNV /WG )HUU\ /DQH 6WDQOH\ :DNHILHOG :) /7 5HJLVWHUHG LQ (Q

### Notes

Chimney Height of 7037mm from FFL to underside of chimney pot.

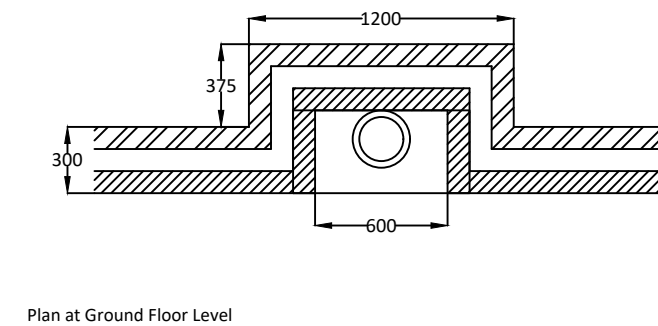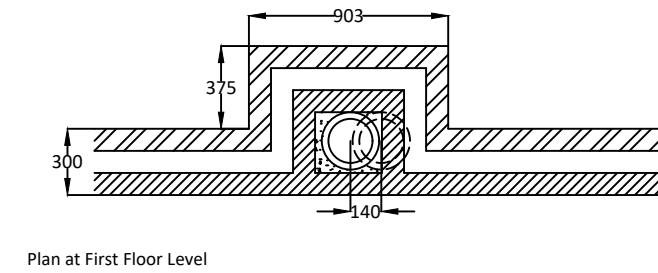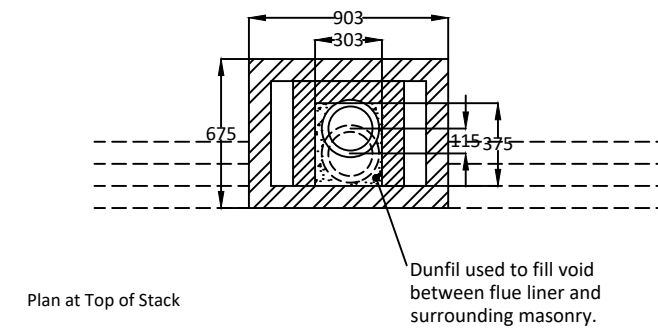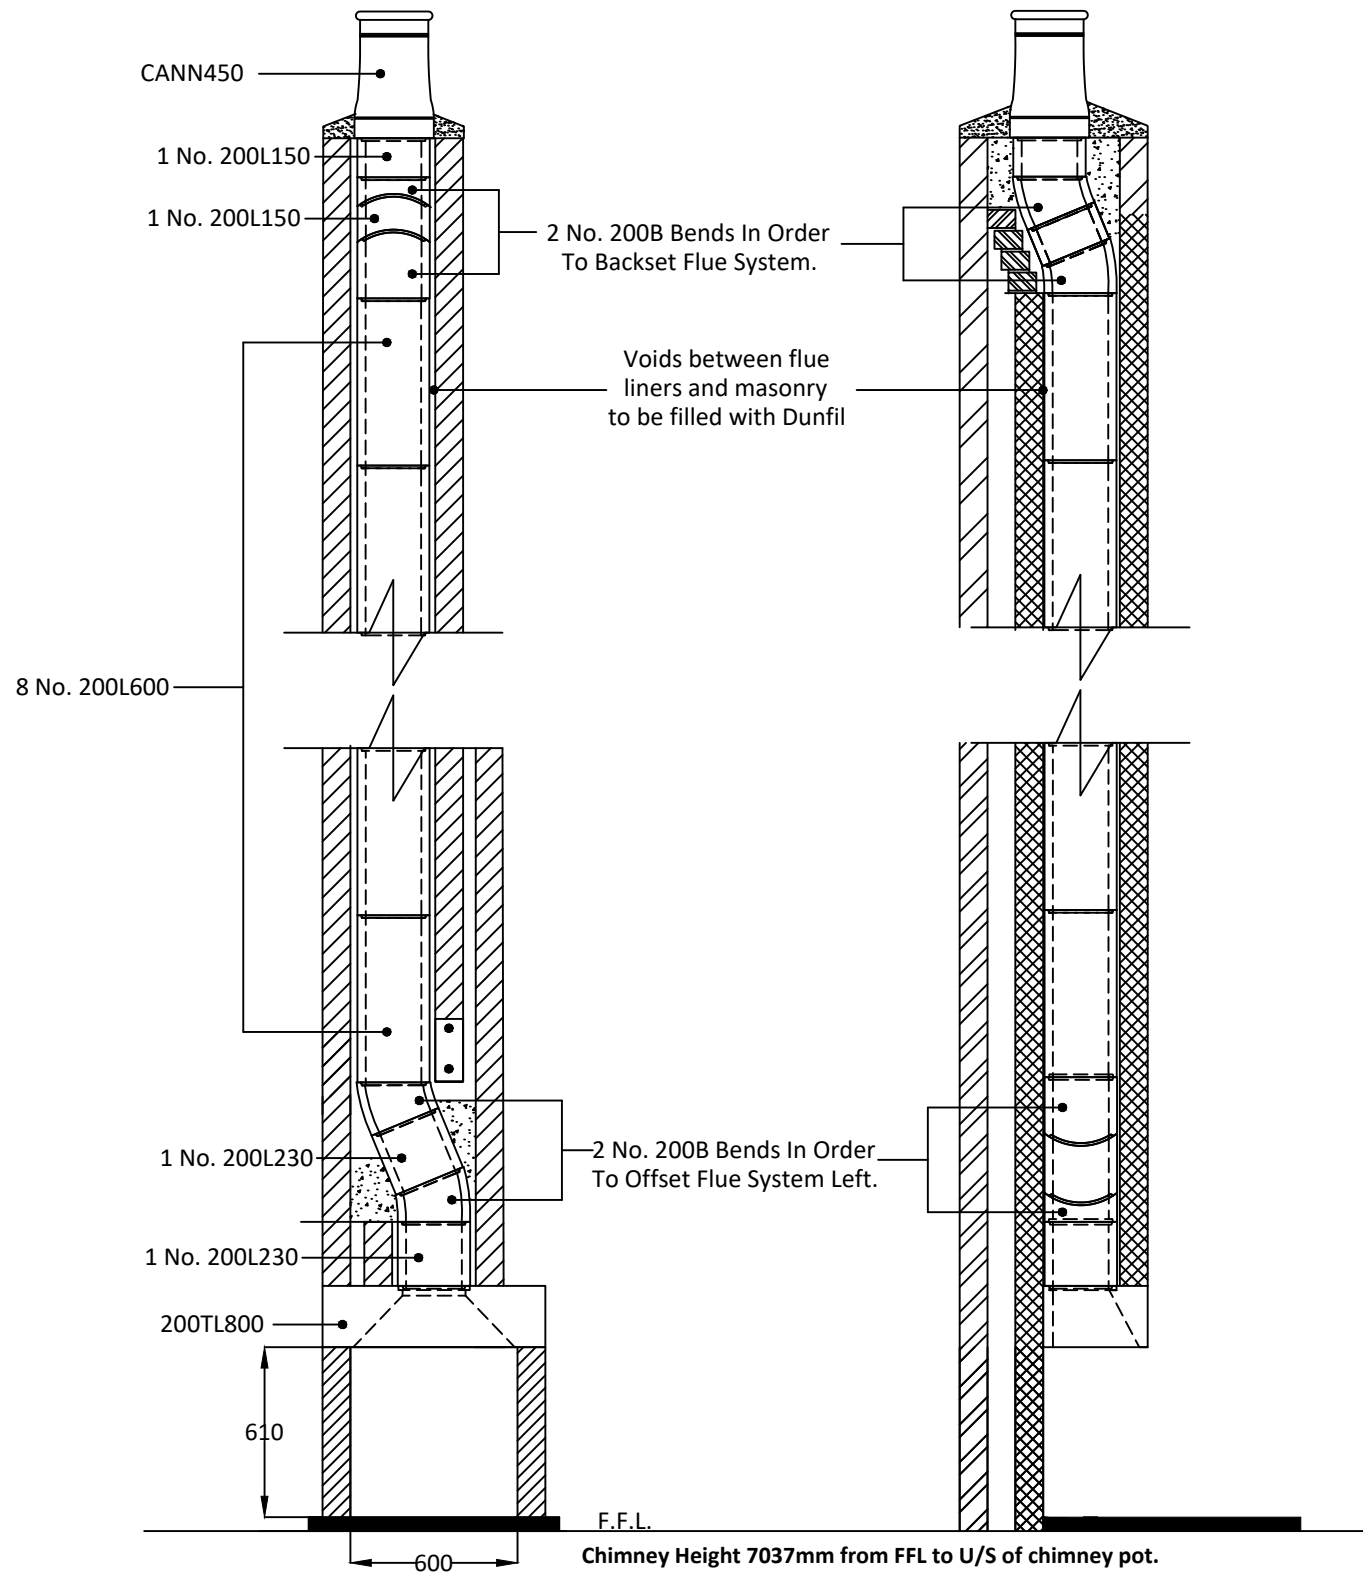

The checklist is based on Building Regulations ADJ Appendix A. with Dunbrik flue liner system data. The builder/installer should insert details of the actual fireplace opening sizes, actual ventilation installed and any variations to the usual data.

For	<b>Typical Flue Detail Costing</b>	Costing ref	<b>200ID-7m-offset-2-23B</b>
Site at		Plot number	
System	<b>Dunbrik 200mm id A1 concrete flue liners</b>	House type	<b>House with 200mm I.D. Flue</b>
Date	<b>31 Jan 2024</b>	Customer ref.	<b>Chimney Height 7017</b>

**Checklist for hearths, fireplaces, flues and chimneys**

This checklist can help you to ensure hearths, fireplaces, flues and chimneys are satisfactory. If you have been directly engaged, copies should also be offered to the client and to the Building Control body to show what you have done to comply with the requirements of part J. If you are a sub-contractor, a copy should be offered to the main contractor.

Items listed in ADJ Appendix A	Details for builder to complete or amend	
1 Building address, where work has been carried out		
		Amend
2 Identification of hearth, fireplace, chimney or flue.	<b>Fireplace in lounge</b>	
3 Firing capability: solid fuel/gas/oil/all	<b>All</b>	
4 Intended type of appliance. State type or make. If open fire give finished fireplace opening dimensions.	<b>For gas fire or solid fuel fire 500mm by 550mm maximum or equivalent area</b>	
5 Ventilation provisions for the appliance State type and area of permanently open air vents	<b>Through wall ventilation 15,700 sq mm minimum</b>	
6 Chimney or flue construction a) State the type or make and whether new or existing. b) Internal flue size (and equivalent flue height, where calculated natural draught gas appliances only). c) If liners are used confirm they are correctly jointed in accordance with manufacturers instructions and state jointing materials used. d) If an existing chimney has been refurbished with a new liner, type or make of liner fitted. e) Details of flue outlet terminal <span style="float:right">Outlet detail</span> <span style="float:right">Complies with:</span> f) Number and angle of bends. g) Provision for cleaning and recommended frequency.	<b>New masonry chimney with: Dunbrik A1 concrete flue liners to BSEN1857 200mm internal diameter</b>  <b>Tongue downwards into rebate and joined with Dunseal fireproof mortar</b>  <b>Cannon pot 450mm tall</b> <b>BSEN13502:2002</b> <b>4 bends ref 200B at 22.5 degrees</b>  <b>Annually via fireplace opening</b>	
7 Hearth. Form of construction. New or existing	<b>New</b> <b>As diagram 25 in ADJ</b>	
8 Inspection and testing after completion Test (Appendix E in AD J 2002) and results Flue inspection results <span style="float:right">Visual</span> <span style="float:right">Sweeping</span> <span style="float:right">Coring ball</span> <span style="float:right">Smoke</span> Appliance (where included) <span style="float:right">Spillage</span>	Tests carried out by:	

**I/We the undersigned confirm that the above details are correct. In my opinion, these works comply with the relevant requirements in Part J of Schedule 1 to the Building Regulations.**

Print name & title	_____	Profession	_____
Capacity	_____	Tel no	_____
Address	_____	Postcode	_____
Signed	_____	Date	_____
Registered membership of (e.g. Gas Safety, OFTEC, HETAS, NACE, NACS)			