Junbrik flues	unbrik A1 Concrete Flue Liner	s	Tel: 01924 373694	
JUNORIK TIUES	for domestic chimneys			
omestic flue & chimney systems	Flue Costing		Email: tech@dunbrik.co.uk	
	200 mm id		Web: www.dunbrik.co.uk	
Costing for: Typical Flue Detail Costing		Costing ref	stove-8m-offset-	ree-23B
House type House with 200mm I.D. Flue		0	00 5 1 0004	
Customer ref. Chimney Height 7971 Site		Date	06 February 2024 SJ	
		By Drive liet		
Plot number Components	Product	Price list	October 2023 Prices	Cost
components	code	Qty	each	£
Boiler/stove connection block at 45deg	200C	1	148.79	148.7
200mm flue liner bend 22.5 degrees	200B	2	18.29	36.5
200mm flue liner 600mm tall	200L600	7	18.74	131.1
200mm flue liner 230mm tall	200L230	2	11.21	22.4
200mm flue liner 150mm tall	200L150	5	8.85	44.2
Flue liner sealant 310ml	Dunseal	6	6.68	40.0
nfill aggregate 22kg mix for void	Dunfil	21	6.98	146.5
Cannon pot 450mm tall red	Cann450R	1	50.90	50.9
Topguard birdguard cowl 260 tall red	TG260R	1	101.36	101.3
Smoke pellet tube	Smoke	1	11.34	11.3
Flue notice plate	Plate	1	7.73	7.7
310ml Skeleton Gun	Sealgun	1	6.40	6.4
Red polypropylene air brick 220mm x 72mm	REDG930	2	0.92	1.8
			Cost ex-works * Delivery charge	759.9
			, ,	
			Goods VAT @ 20%	£ 819.9
All prices are ex-works, valid for 30 days and are subject	to VAT		Total 20%	£ 983.4
Charge for individually plotting multiple flue orders is £30 Free delivery for orders over £1,000 nett invoice value (e All trading is subject to our standard conditions of sale (o) per plot. ex-Vat) to UK mainland excluding th	he Highlands o		2 303
Notes				
This flue costing is based on information provided. Pleas to ensure that it meets with your requirements. Please For construction guidance refer to the flue illustration and	also check the pot/terminal style ar	nd colour.		

The infill is based on a 350mm x 350mm void between the liners and masonry

Please ensure that the flue and chimney are constructed in accordance with Building regulations part J


Dunbrik (Yorks) Ltd 172 Ferry Lane, Stanley, Wakefield WF3 4LT - Registered in England 419512

dunbrik flues

Sample 200mm I.D. flue liner system for free standng stove appliance with offset.

domestic flue & chimney systems

Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

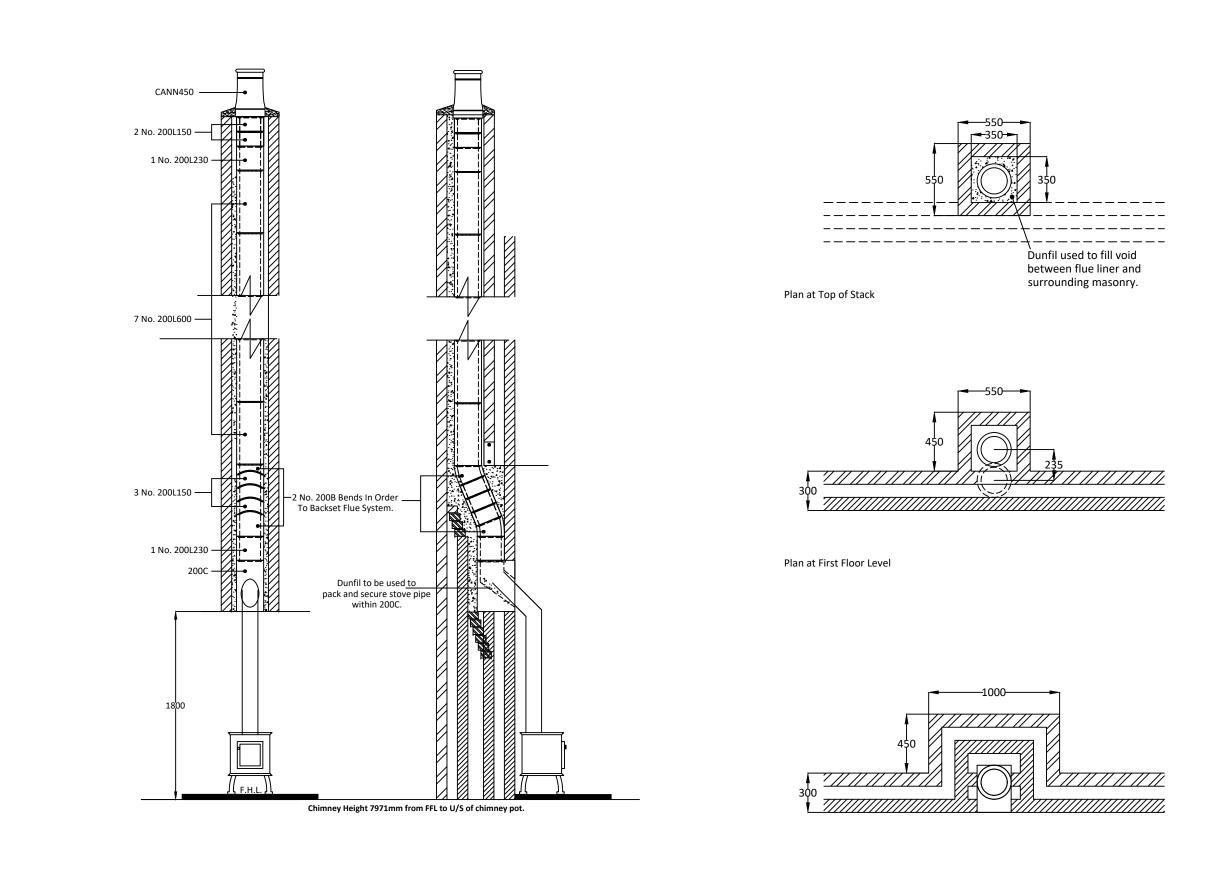

Plan at Ground Floor Level

Date: October 2023

Ref: stove-8m-offset-free-23b

Notes

Chimney Height from FFL to underside of chimney pot.

Please have your architect check this typical flue illustration to your drawings to ensure it meets both your requirements and current building regulations.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES NOT TO SCALE

	Chimney	Checklist Dunbrik (Yorks) Ltd					
	omestic flue & chimney systems	Tel: 01924 373694 Email: tech@dunbrik.co.uk					
The	e checklist is based on Building Regulations ADJ Appendix buld insert details of the actual fireplace opening sizes, ac						
	e at stem Dunbrik 200mm id A1 concrete flue liners	Costing ref stove-8m-offset Plot number House type House with 200n Customer ref Chimpoy Height	nm I.D. Flue				
Da		Customer ref. Chimney Height firenlaces flues and chimneys	79/1				
Checklist for hearths, fireplaces, flues and chimneys This checklist can help you to ensure hearths, fireplaces, flues and chimneys are satisfactory. If you have been directly engaged, copies should also be offered to the client and to the Building Control body to show what you have done to comply with the requirements of part J. If you are a sub-contractor, a copy should be offered to the main contractor.							
	Items listed in ADJ Appendix A	Details for builder to complete or amend					
1	1 Building address, where work has been carried out						
		I	Amend				
	Identification of hearth, fireplace, chimney or flue.	Fireplace in lounge					
	Firing capability: solid fuel/gas/oil/all	All					
4	Intended type of appliance. State type or make. If open fire give finished fireplace opening dimensions.	For domestic fuel stove up to a 200mm external diameter flue outlet pipe					
5	Ventilation provisions for the appliance State type and area of permanently open air vents	Through wall ventilation As per stove manufacturers requirements					
	Chimney or flue construction State the type or make and whether new or existing.	New masonry chimney with: Dunbrik A1 concrete flue liners to BSEN1857					
b)	Internal flue size (and equivalent flue height, where calculated natural draught gas appliances only).	200mm internal diameter					
c)	If liners are used confirm they are correctly jointed in accordance with manufacturers instructions and state jointing materials used.	Tongue downwards into rebate and joined with Dunseal fireproof mortar					
d)	If an existing chimney has been refurbished with a new liner, type or make of liner fitted.						
e)	Details of flue outlet terminal Outlet detail	Cannon pot 450mm tall					
	Complies with:						
t)	Number and angle of bends.	2 bends ref 200B at 22.5 degrees					
	Provision for cleaning and recommended frequency.	Annually via stove					
7	Hearth. Form of construction. New or existing	New As diagram 25 in ADJ					
8	Inspection and testing after completion Test (Appendix E in AD J 2002) and results Flue inspection results Sweeping Coring ball Smoke	Tests carried out by:					
	Appliance (where included) Spillage						
	l/We the undersigned confirm that the above details are correct. In my opinion, these works comply with the relevant requirements in Part J of Schedule 1 to the Building Regulations.						
	Print name & title Profession						
	defined a						
	Signed Registered membership of (e.g. Gas Safety, OFTEC, H						