

## **Dunbrik A1 Concrete Flue Liners**

for domestic chimneys

# Flue Costing

200 mm id

Tel: 01924 373694

Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

**Typical Flue Detail Costing** Costing for: House type House with 200mm I.D. Flue Customer ref. Chimney Height 9005mm

Date Ву

Costing ref

stove-9m-straight-2-sided-23B

06 February 2024 SJ

Plot number	F	Price list	October 2023		
Components	Product Qty		Prices	Cost	
	code		each	£	
Fireplace recess closure block 215mm x 552mm x 65mm	FRCB215	2	11.36	22.72	
Fireplace recess closure block 110mm x 552mm x 65mm	FRCB110	2	8.77	17.54	
Stove connection block 552mm x 552mm x 150mm	200SCB	1	145.80	145.80	
200mm flue liner 600mm tall	200L600	12	18.74	224.88	
200mm flue liner 230mm tall	200L230	1	11.21	11.21	
200mm flue liner 150mm tall	200L150	1	8.85	8.85	
Flue liner sealant 310ml	Dunseal	5	6.68	33.40	
Infill aggregate 22kg mix for void	Dunfil	27	6.98	188.46	
Cannon pot 450mm tall red	Cann450R	1	50.90	50.90	
Topguard birdguard cowl 260 tall red	TG260R	1	101.36	101.36	
Smoke pellet tube	Smoke	1	11.34	11.34	
Flue notice plate	Plate	1	7.73	7.73	
Stove pipe adaptor for 200SCB (155mm to 200mm)	13060888	1	147.40	147.40	
310ml Skeleton Gun	Sealgun	1	6.40	6.40	
Red polypropylene air brick 220mm x 72mm	REDG930	2	0.92	1.84	
High impact styrene black cavity sleeve 218mm x 72mm	CSG935	2	5.03	10.06	

Cost ex-works \* 989.89 Delivery charge 60.00 1,049.89 Goods 20% VAT @ 209.98 Total £ 1,259.87

All prices are ex-works, valid for 30 days and are subject to VAT.

Charge for individually plotting multiple flue orders is £30 per plot.

Free delivery for orders over £1,000 nett invoice value (ex-Vat) to UK mainland excluding the Highlands of Scotland (POA).

All trading is subject to our standard conditions of sale (copy available).

#### Notes

This flue costing is based on information provided. Please have your architect check the costing to your drawings prior to ordering. to ensure that it meets with your requirements. Please also check the pot/terminal style and colour.

For construction guidance refer to the flue illustration and the installation guide available on our website www.dunbrikflues.co.uk

## The infill is based on a 352mm x 352mm void between the liners and masonry

Please ensure that the flue and chimney are constructed in accordance with Building regulations part J

Dunbrik (Yorks) Ltd 172 Ferry Lane, Stanley, Wakefield WF3 4LT - Registered in England 419512



Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

Sample 200mm I.D. straight flue liner system for stove appliance.


Date: October 2023

Ref: stove-9m-straight-2-sided-23b

Notes

Please note the fireplace recess closure blocks are a non-load bearing unit.

Chimney Height of 9005mm from FFL to underside of chimney pot.

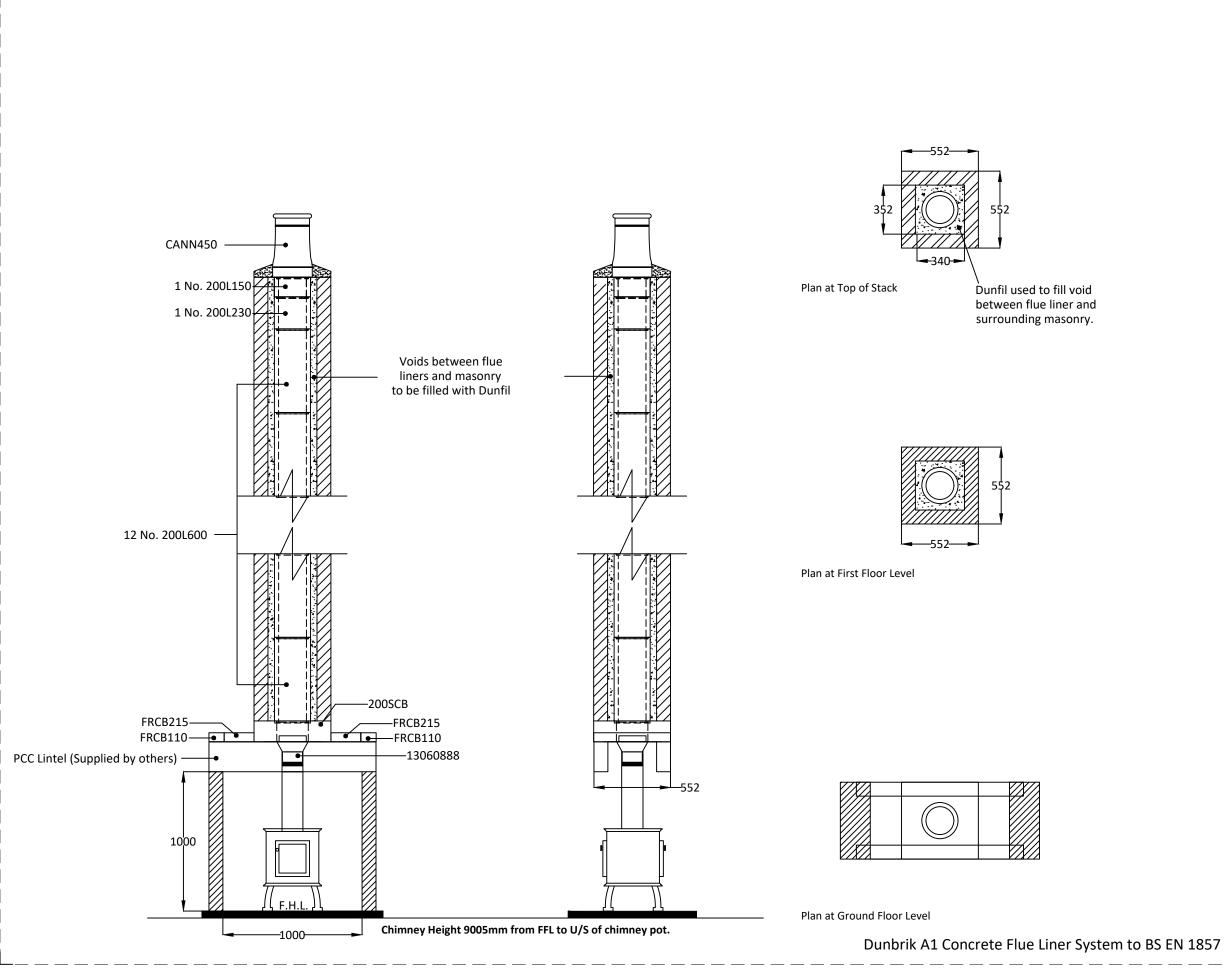

Please have your architect check this typical flue illustration to your drawings to ensure it meets both your requirements and current building regulations.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES
NOT TO SCALE



Dunbrik (Yorks) Ltd

Tel: 01924 373694 Email: tech@dunbrik.co.uk

The checklist is based on Building Regulations ADJ Appendix A. with Dunbrik flue liner system data. The builder/installer should insert details of the actual fireplace opening sizes, actual ventilation installed and any variations to the usual data.

**Typical Flue Detail Costing** For Costing ref stove-9m-straight-2-sided-23B Site at Plot number **Dunbrik 200mm id A1 concrete flue liners** House with 200mm I.D. Flue System House type Date 06 Feb 2024 200 mm id Customer ref. **Chimney Height 9005mm** 

## Checklist for hearths, fireplaces, flues and chimneys

This checklist can help you to ensure hearths, fireplaces, flues and chimneys are satisfactory. If you have been directly engaged,

			g Control body to show what you have done to comply by should be offered to the main contractor.	/ WILFI			
	Items listed in ADJ Appendix A		Details for builder to complete or amend				
1	Building address, where work has been	carried out					
_				Amend			
	Identification of hearth, fireplace, chimi	ney or flue.	Fireplace in lounge				
	Firing capability: solid fuel/gas/oil/all		All				
4	Intended type of appliance. State type If open fire give finished fireplace open		For domestic fuel stove up to a 200mm external diameter flue outlet pipe				
5	Ventilation provisions for the appliance State type and area of permanently open air vents		Through wall ventilation As per stove manufacturers requirements				
	Chimney or flue construction State the type or make and whether ne	w or existing.	New masonry chimney with: Dunbrik A1 concrete flue liners to BSEN1857				
b)	Internal flue size (and equivalent flue h calculated natural draught gas appliance		200mm internal diameter				
c)	If liners are used confirm they are corre in accordance with manufacturers instructed state jointing materials used.		Tongue downwards into rebate and joined with Dunseal fireproof mortar				
d)	If an existing chimney has been refurbinew liner, type or make of liner fitted.	shed with a					
e)	Details of flue outlet terminal	Outlet detail	Cannon pot 450mm tall				
		Complies with:	BSEN13502:2002				
f)	Number and angle of bends.						
g)	Provision for cleaning and recommended frequency.		Annually via stove				
7	Hearth. Form of construction. New or e	xisting	New As diagram 25 in ADJ				
8	Inspection and testing after completion Test (Appendix E in AD J 2002) and re Flue inspection results		Tests carried out by:				
	Appliance (where included)	Spillage					
_	I/We the undersigned confirm that the relevant requirements in Part J of S		are correct. In my opinion, these works comply wi Building Regulations.	th the			
Print name & title  Capacity			Profession				
			Tel no				
	A dalage on		Dootsondo				
	0:		D-4-				
	Registered membership of (e.g. Gas S						