dunbrik flues
domestic flue & chimney systems
Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

Typical 300mm I.D. flue liner system for open with offset.

Date: November 2021

Ref: **300id-6m-offset**

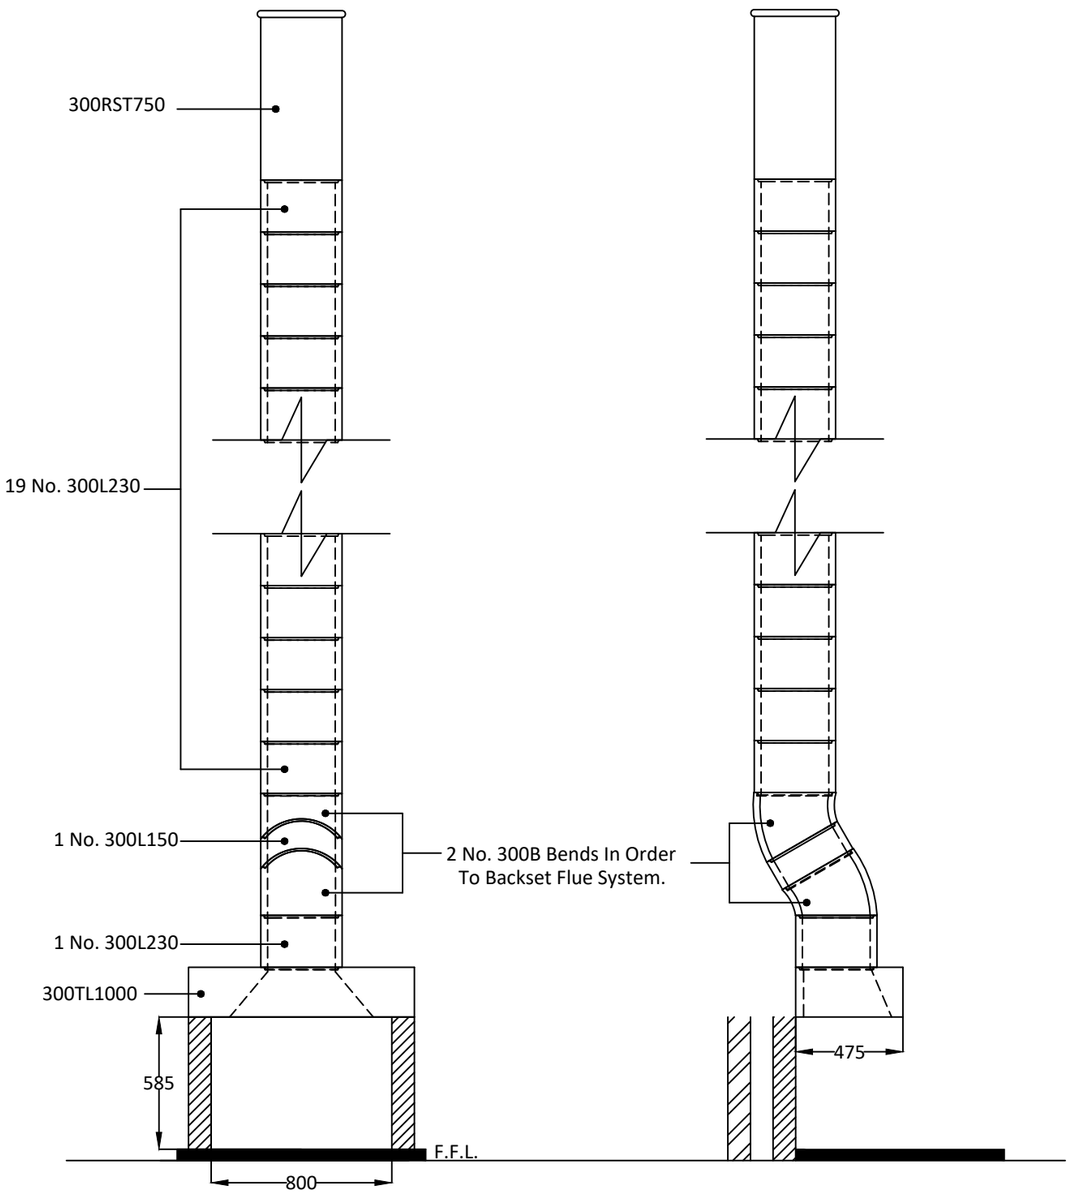

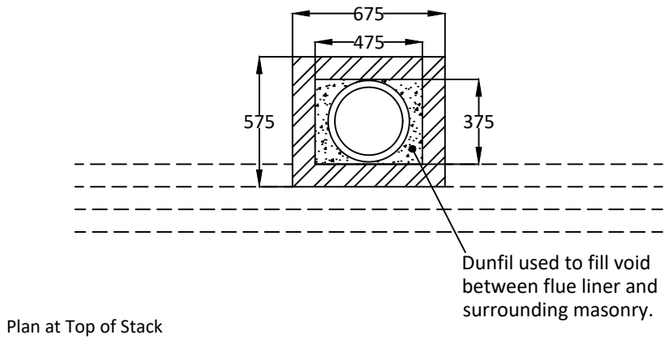

Plan at Top of Stack

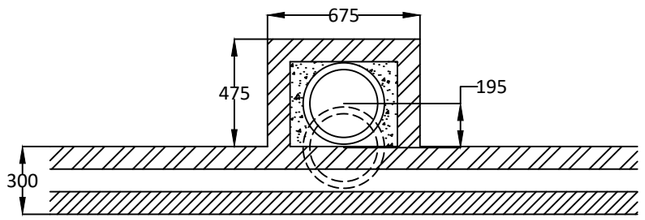

Plan at First Floor Level

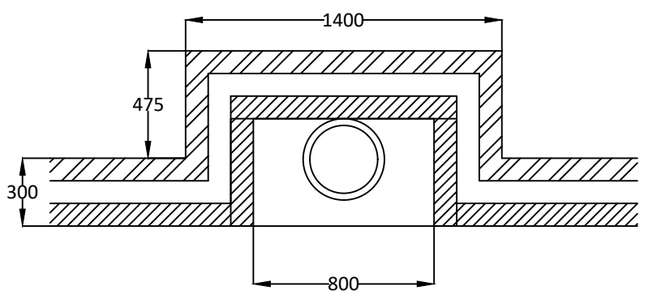

Plan at Ground Floor Level

Notes

Chimney Height taken from FFL to underside of chimney pot.

Please have your architect check this estimate to your drawings to ensure it meets both your requirements and current building regulations, british standards and codes of practice.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES NOT TO SCALE

Dunbrik A1 Concrete Flue Liner System to BS EN 1857

dunbrik flues
domestic flue & chimney systems
Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

Sample 300mm I.D. straight flue liner system with backset for open.

Date: November 2021

Ref: **300sq-6m-offset**

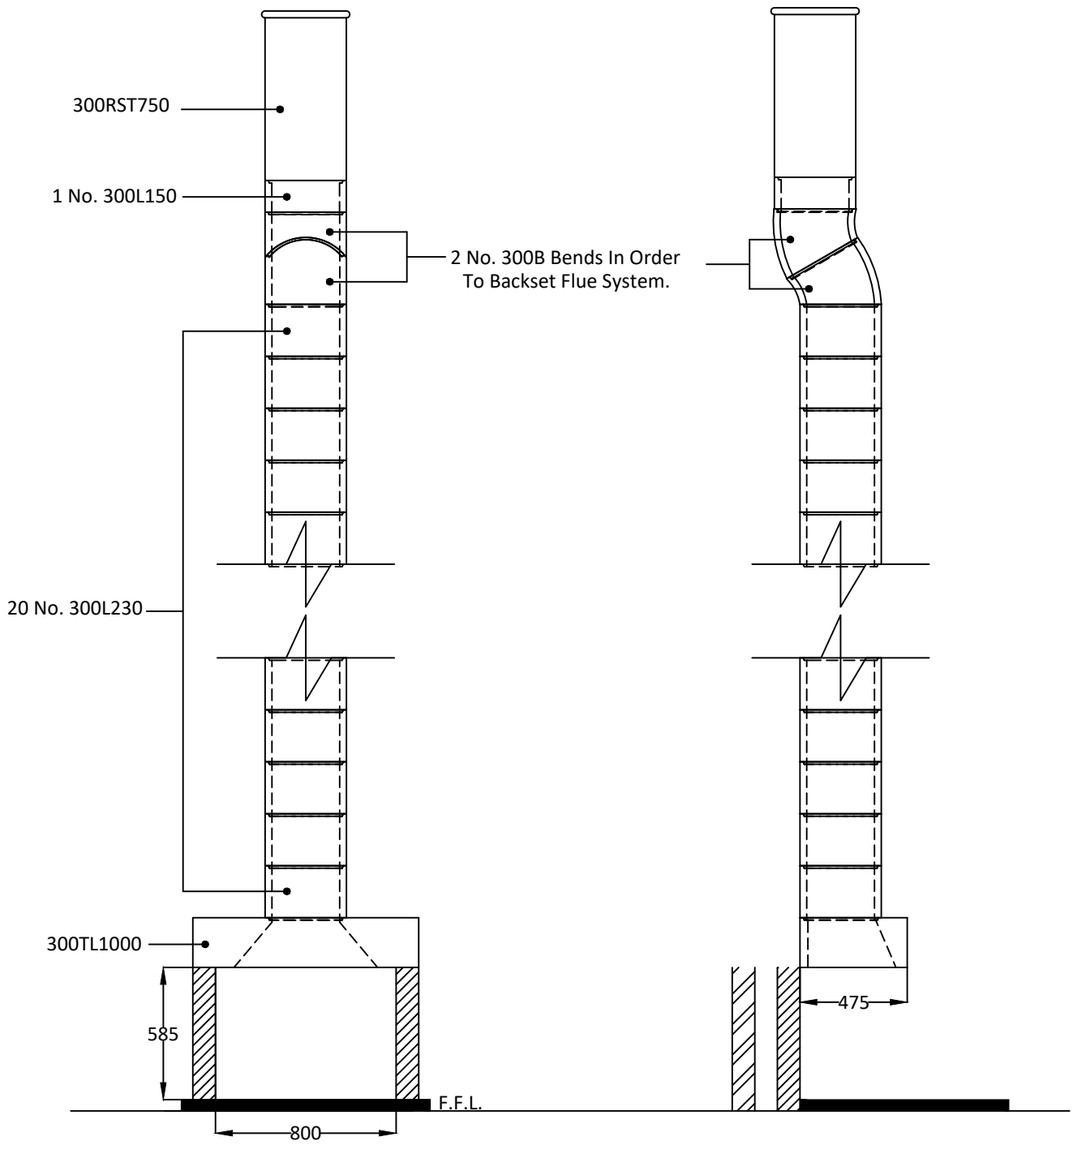

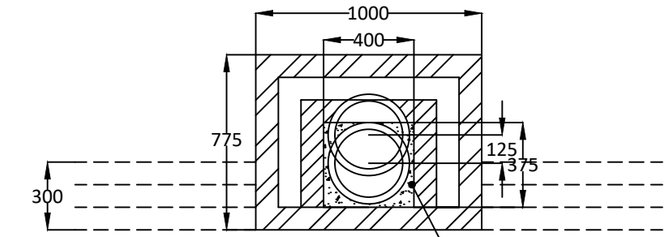

Plan at Top of Stack

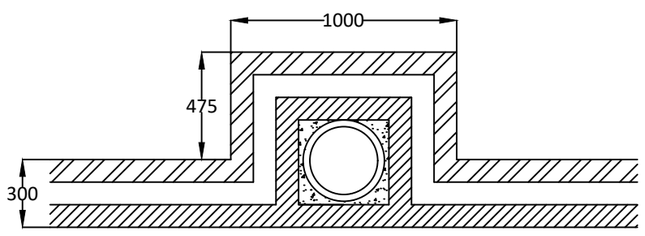

Plan at First Floor Level

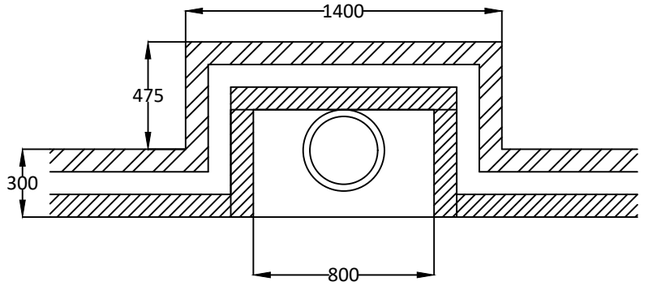

Plan at Ground Floor Level

Dunbrik A1 Concrete Flue Liner System to BS EN 1857

Notes

Chimney Height taken from FFL to underside of chimney pot.

Please have your architect check this estimate to your drawings to ensure it meets both your requirements and current building regulations, british standards and codes of practice.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES NOT TO SCALE

dunbrik flues
domestic flue & chimney systems
Telephone: 01924 373694 Email: tech@dunbrik.co.uk Web: www.dunbrik.co.uk

Sample 300mm I.D. straight flue liner system with backset for open.

Date: November 2021

Ref: **300id-6m-offset**

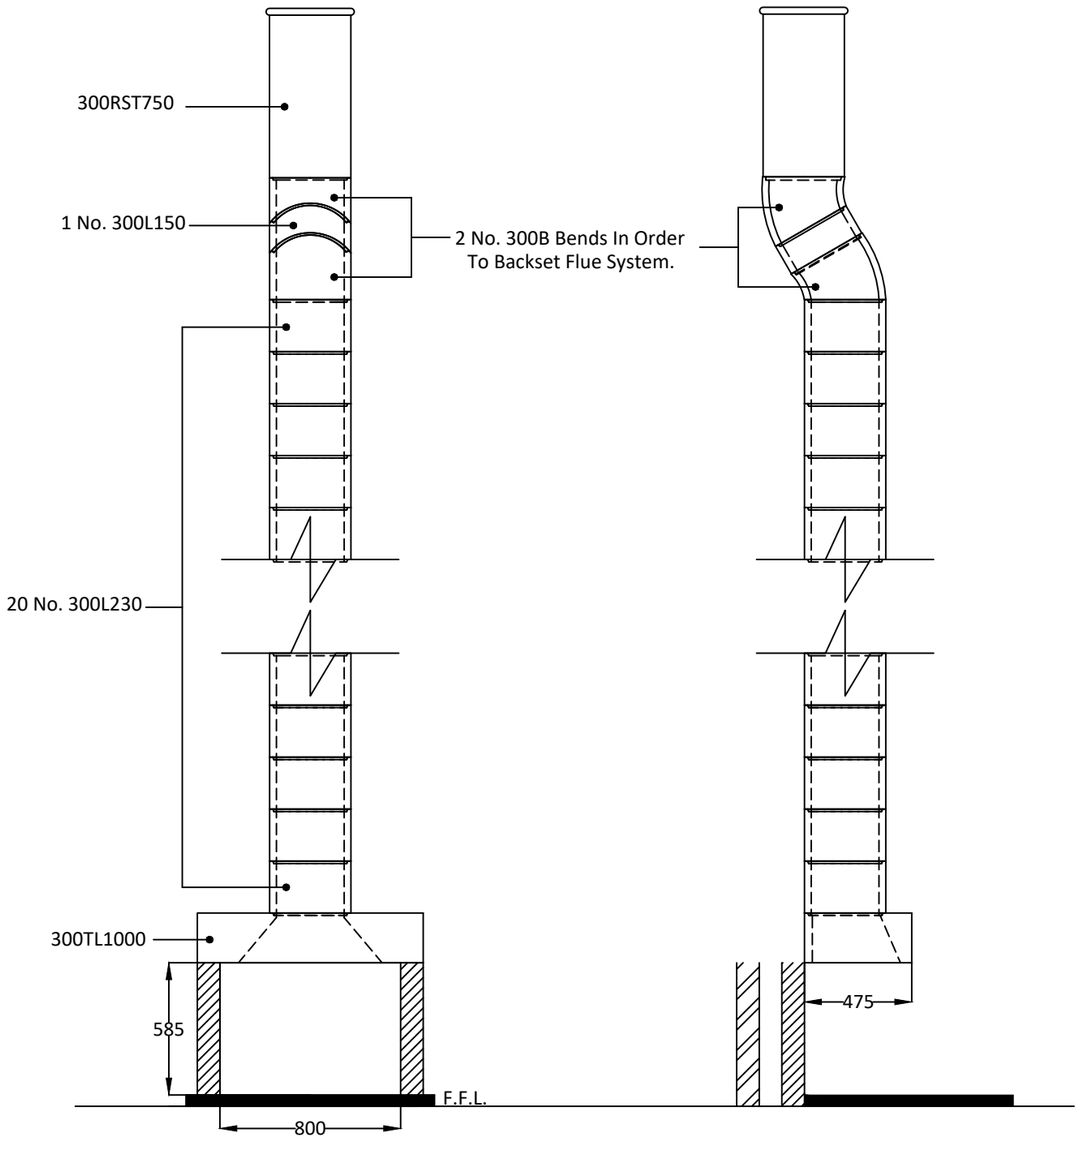

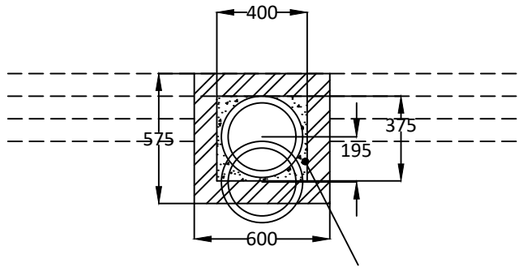

Plan at Top of Stack

Dunfil used to fill void between flue liner and surrounding masonry.

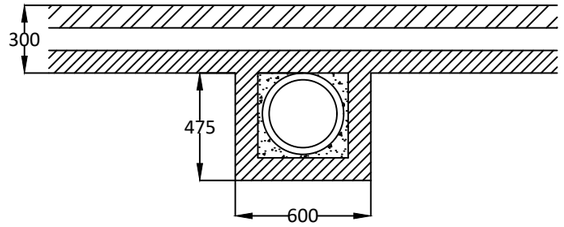

Plan at First Floor Level

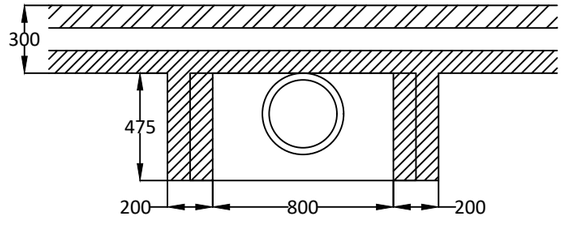

Plan at Ground Floor Level

Dunbrik A1 Concrete Flue Liner System to BS EN 1857

Notes

Chimney Height taken from FFL to underside of chimney pot.

Please have your architect check this estimate to your drawings to ensure it meets both your requirements and current building regulations, british standards and codes of practice.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES NOT TO SCALE

dunbrik flues
domestic flue & chimney systems

Dunbrik A1 Concrete Flue Liners
for domestic chimneys
Flue Costing
300 mm id

Tel: 01924 373694
Email: tech@dunbrik.co.uk
Web: www.dunbrik.co.uk

Costing for: **Typical System Price**
House type House with 300mm I.D. Flue.
Customer ref. Chimney height 6000mm, Offset 195mm.
Site
Plot number

Costing ref **300id-6m-offset**
Date 24 November 2021
By
Price list October 2021

Components	Product code	Qty	Prices each	Cost £
Throat lintel/gather unit 1000mm wide	300TL1000	1	108.29	108.29
300mm flue liner bend at 30 degrees	300B	2	49.96	99.92
300mm flue liner 230mm tall	300L230	20	27.26	545.20
300mm flue liner 150mm tall	300L150	1	16.89	16.89
Flue liner sealant 310ml	Dunseal	12	6.68	80.16
Infill aggregate 22kg mix for void	Dunfil	24	13.92	334.08
300mm straight 750mm pot red	300RST750R	1	222.65	222.65
Topguard birdguard cowl 350 id red	TG350R	1	155.06	155.06
Smoke pellet tube	Smoke	1	11.34	11.34
Flue notice plate	Plate	1	7.73	7.73
310ml Skeleton Gun	Sealgun	1	6.40	6.40
Red polypropylene air brick 220mm x 72mm	REDG930	6	0.92	5.52
High impact styrene black cavity sleeve 218mm x 72mm	CSG935	6	5.03	30.18

Cost ex-works *		**1623.42**
Delivery charge		**95.00**
Goods		**£ 1,718.42**
VAT @	20%	**343.68**
Total		**£ 2,062.10**

All prices are ex-works, valid for 30 days and are subject to VAT.
Free delivery for orders over £1,700 goods value to UK mainland excluding the Scotish Highlands (POA).
All trading is subject to our standard conditions of sale (copy available).

Notes

This flue costing is based on information provided. Please have your architect check the costing to your drawings prior to ordering. to ensure that it meets with your requirements. Please also check the pot/terminal style and colour.
For construction guidance refer to the flue illustration and the installation guide available on our website www.dunbrikflues.co.uk

Please ensure that the flue and chimney are constructed in accordance with Building regulations part J

dunbrik flues
domestic flue & chimney systems

Chimney Checklist

Dunbrik (Yorks) Ltd
Tel: 01924 373694 Email: tech@dunbrik.co.uk

The checklist is based on Building Regulations ADJ Appendix A. with Dunbrik flue liner system data. The builder/installer should insert details of the actual fireplace opening sizes, actual ventilation installed and any variations to the usual data.

For	**Typical System Price**	Costing ref	**300id-6m-offset**
Site at		Plot number	
System	**Dunbrik 300mm id A1 concrete flue liners**	House type	**House with 300mm I.D. Flue.**
Date	**24 Nov 2021** **300 mm id**	Customer ref.	**Chimney height 6000mm, Offset 195mm.**

Checklist for hearths, fireplaces, flues and chimneys

This checklist can help you to ensure hearths, fireplaces, flues and chimneys are satisfactory. If you have been directly engaged, copies should also be offered to the client and to the Building Control body to show what you have done to comply with the requirements of part J. If you are a sub-contractor, a copy should be offered to the main contractor.

Items listed in ADJ Appendix A	Details for builder to complete or amend	Amend
1 Building address, where work has been carried out		
2 Identification of hearth, fireplace, chimney or flue.	**Fireplace in lounge**	
3 Firing capability: solid fuel/gas/oil/all	**All**	
4 Intended type of appliance. State type or make. If open fire give finished fireplace opening dimensions.	**For gas fire or solid fuel fire** **471,200 sq.mm maximum**	
5 Ventilation provisions for the appliance State type and area of permanently open air vents	**Through wall ventilation** **35,300 sq mm minimum**	
6 Chimney or flue construction a) State the type or make and whether new or existing.	**New masonry chimney with:** **Dunbrik A1 concrete flue liners to BSEN1857**	
b) Internal flue size (and equivalent flue height, where calculated natural draught gas appliances only).	**300mm internal diameter**	
c) If liners are used confirm they are correctly jointed in accordance with manufacturers instructions and state jointing materials used.	**Tongue downwards into rebate** **and joined with Dunseal fireproof mortar**	
d) If an existing chimney has been refurbished with a new liner, type or make of liner fitted.		
e) Details of flue outlet terminal — Outlet detail	**300mm straight 750mm pot**	
Complies with:	**BSEN13502:2002**	
f) Number and angle of bends.	**2 bends ref 300B at 30 degrees**	
g) Provision for cleaning and recommended frequency.	**Annually via fireplace opening**	
7 Hearth. Form of construction. New or existing	**New** **As diagram 25 in ADJ**	
8 Inspection and testing after completion Test (Appendix E in AD J 2002) and results	Tests carried out by:	
Flue inspection results — Visual, Sweeping, Coring ball, Smoke		
Appliance (where included) — Spillage		

I/We the undersigned confirm that the above details are correct. In my opinion, these works comply with the relevant requirements in Part J of Schedule 1 to the Building Regulations.

Print name & title _____ Profession _____

Capacity _____ Tel no _____

Address _____ Postcode _____

Signed _____ Date _____

Registered membership of (e.g. Gas Safety, OFTEC, HETAS, NACE, NACS)